



PART # M58772

VersaLAN™

Category 6 Indoor/Outdoor CM

4 Pair #24 AWG UTP Category 6 Cable

DESCRIPTION

THE CABLE IS SUITABLE FOR USE IN BUILDINGS IN WET LOCATIONS AND SUITABLE FOR USE OUTDOORS IN DUCT AND FOR AERIAL LASHING. IT IS FULLY WATER BLOCKED AND HAS A BLACK SUNLIGHT RESISTANT JACKET. IT IS NOT SUITABLE FOR DIRECT BURIAL. THIS PRODUCT AND/OR ITS MANUFACTURE IS COVERED BY US PATENT NOS. 6074503, 6596944 & 5424491.

THE CABLE IS NEC RATED FOR GENERAL PURPOSE COMMUNICATIONS USE IN ACCORDANCE WITH ARTICLE 800 OF THE NATIONAL ELECTRICAL CODE (NEC). THE CABLE IS UL (USA) & cUL (CANADA) LISTED FOR THIS APPLICATION BY PASSING UL 1581 VERTICAL TRAY FLAME TEST.

THIS CABLE COMPLIES WITH THE EU-RoHS DIRECTIVE 2002/95/EC (RESTRICTIONS ON HAZARDOUS SUBSTANCES) REGULATIONS.

SUPPORTED APPLICATIONS

IEEE 802.3 10BASE-T (ETHERNET), 100BASE-T (FAST ETHERNET), AND 1000BASE-T (GIGABIT ETHERNET), IEEE 802.3af POWER OVER ETHERNET FOR VoIP, ANSI X3.263 FDDI TP-PMD, IEEE 802.5 4 AND 16 Mbps TOKEN RING, ATM UP TO 155 Mbps, 550 MHz BROADBAND VIDEO AND STANDARDS UNDER DEVELOPMENT SUCH AS ATM AT 622 Mbps, 1.2 & 2.4 Gbps.

CONSTRUCTION

PRIMARIES: CONDUCTOR: 24 AWG (.5 mm) SOLID BARE COPPER
INSULATION: THERMOPLASTIC POLYOLEFIN

PAIR ASSEMBLY: 2 PRIMARIES TWISTED IN VARIED LAYS

CABLE ASSEMBLY: 4 PAIRS CABLED TOGETHER WITH A FLEXWEB CORE SEPARATOR

COLOR CODE: SEE TABLE 1 (WHITE CONDS HAVE INTEGRAL STRIPE TO MATCH THEIR MATE)

JACKET: MATERIAL: BLACK FR POLYOLEFIN
NOMINAL WALL: .040" (1.02 mm)
NOMINAL DIAMETER: .271 (6.88 mm)

NOTE: CABLE FLOODED FOR MOISTURE PROTECTION

LISTINGS: UL/cUL TYPE CM-LS

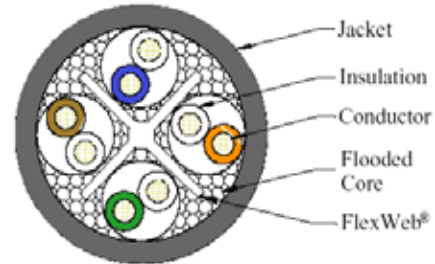


TABLE 1

PAIR NUMBER	PAIR COLOR CODE	
	1	WHITE-BLUE
2	WHITE-ORANGE	ORANGE
3	WHITE-GREEN	GREEN
4	WHITE-BROWN	BROWN

PHYSICAL CHARACTERISTICS

CABLE WEIGHT: 43 lbs/1000ft (64 kg/km)
BEND RADIUS: 2.75" (70 mm) MIN (10 x CABLE OD)
OPERATING TEMP.: -20°C to +60°C (-4°F to +140°F)
STORAGE TEMP.: -40°C to +75°C (-40°F to +167°F)
INSTALLATION TEMP.*: -20°C to +60°C (-4°F to +140°F)

*THE INSTALLATION TEMPERATURE REFERS TO THE TEMPERATURE OF THE CABLE WHILE BEING INSTALLED OR PULLED.

FLAME & SMOKE CHARACTERISTICS

FLAME TESTS: UL 1581 VERTICAL TRAY, IEEE 383, IEC 332-1, UL VW-1, CSA FT1
LIMITED SMOKE: -LS PER UL 1685
SMOKE DENSITY: IEC 1034
COMBUSTION GASSES: IEC 754-2

VersaLAN™ Category 6 Indoor/Outdoor CM

4 Pair #24 AWG UTP Category 6 Cable

ELECTRICAL CHARACTERISTICS (REF TABLE 2)

STANDARDS:	EXCEEDS TIA/EIA 568-B.2 CAT 6, ISO/IEC 11801:2002 CAT 6, & IEC 61156-5 CAT 6 HORIZONTAL CABLE	INSERTION LOSS:	$1.795 \sqrt{f} + .017f + \frac{.20}{\sqrt{f}}$ dB/100m MAX
VOLTAGE RATING:	300 VOLTS	NEAR END CROSSTALK (NEXT):	$45.3 - 15 \log_{10}(f/100)$ dB/100m MIN
CONDUCTOR DCR:	8.9 Ω /100m (27.1 Ω /Mft) MAX	POWER SUM NEAR END CROSSTALK (PS-NEXT):	$43.3 - 15 \log_{10}(f/100)$ dB/100m MIN
DCR UNBALANCE:	3% MAX	EQUAL LEVEL FAR END CROSSTALK (ELFEXT):	$30 - 20 \log_{10}(f/100)$ dB/100m MIN
MUTUAL CAPACITANCE:	51.5 pF/m (15.7 pF/ft) NOM	POWER SUM EQUAL LEVEL FAR END CROSSTALK (PS-ELFEXT):	$28 - 20 \log_{10}(f/100)$ dB/100m MIN
CAPACITANCE UNBALANCE PAIR/GROUND:	66 pF/100m (200 pF/Mft) MAX	PROPAGATION DELAY:	$534 + 36 / \sqrt{f}$ ns/100m MAX
CHARACTERISTIC IMPEDANCE:	100 $\Omega \pm 15\%$ (1-350 MHz)	DELTA DELAY (SKEW):	25 ns/100m MAX
INPUT IMPEDANCE:	100 $\Omega \pm 15\%$ (1-100 MHz) 100 $\Omega \pm 18\%$ (>100-200 MHz) 100 $\Omega \pm 22\%$ (>200-350 MHz)	NOMINAL VELOCITY OF PROPAGATION (NVP):	65%
RETURN LOSS (RL):	20 + 5 $\log_{10}(f)$ dB MIN (1-10 MHz) 25 dB MIN (>10-20 MHz) 25 - 7 $\log_{10}(f / 20)$ dB MIN (>20 MHz)	WHERE f = FREQUENCY IN MHz from .772 to 350 MHz, except for ELFEXT and PS-ELFEXT from 1 to 350 MHz.	

TABLE 2

REFERENCE ELECTRICAL CHARACTERISTICS

FREQ (MHz)	INSERTION LOSS (dB/100m)		NEXT (dB/100m)		ACR (dB/100m)	PS-NEXT (dB/100m)		PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	RL (dB)
	avg	max	avg	min	min	avg	min	min	min	min	min
.772	1.6	1.8	86	77.0	75.2	80	75.0	73.2	-	-	-
1.0	1.8	2.0	82	75.3	73.3	75	73.3	71.3	70.0	68.0	20.0
4.0	3.5	3.8	73	66.3	62.5	65	64.3	60.5	58.0	56.0	23.0
8.0	5.0	5.3	69	61.8	56.5	61	59.8	54.5	51.9	49.9	24.5
10.0	5.6	5.9	67	60.3	54.4	60	58.3	52.4	50.0	48.0	25.0
16.0	7.1	7.5	66	57.2	49.7	58	55.2	47.7	45.9	43.9	25.0
20.0	7.9	8.4	64	55.8	47.4	56	53.8	45.4	44.0	42.0	25.0
25.0	8.9	9.4	63	54.3	44.9	54	52.3	42.9	42.0	40.0	24.3
31.25	10.0	10.6	62	52.9	42.3	53	50.9	40.3	40.1	38.1	23.6
62.5	14.4	15.3	58	48.4	33.1	49	46.4	31.1	34.1	32.1	21.5
100.0	18.5	19.7	54	45.3	25.6	45	43.3	23.6	30.0	28.0	20.1
155.0	23.5	25.0	52	42.4	17.4	43	40.4	15.4	26.2	24.2	18.8
200.0	27.2	28.8	50	40.8	12.0	42	38.8	10.0	24.0	22.0	18.0
250.0	30.7	32.6	49	39.3	6.7	40	37.3	4.7	22.0	20.0	17.3
300.0	34.0	36.2	48	38.1	2.0	39	36.1	0.0	20.5	18.5	16.8
350.0	37.2	39.5	47	37.1	-	38	35.1	-	19.1	17.1	16.3
400.0	40.2	42.7	46	36.3	-	37	34.3	-	-	-	15.9
500.0	45.8	48.6	45	34.8	-	36	32.8	-	-	-	15.2
550.0	48.4	51.5	44	34.2	-	35	32.2	-	-	-	14.9

VALUES ABOVE 350 MHz ARE FOR ENGINEERING INFORMATION ONLY.

Mohawk reserves the right to change specification in the interest of product enhancement.



9 Mohawk Drive, Leominster, MA 01453
 (978) 537-9961 • 1-800-422-9961 • FAX (978) 537-4358
 info@mohawk-cable.com www.mohawk-cable.com
 ©Mohawk 03/2007